


International Standard Conditioners - "D" Case Enclosure

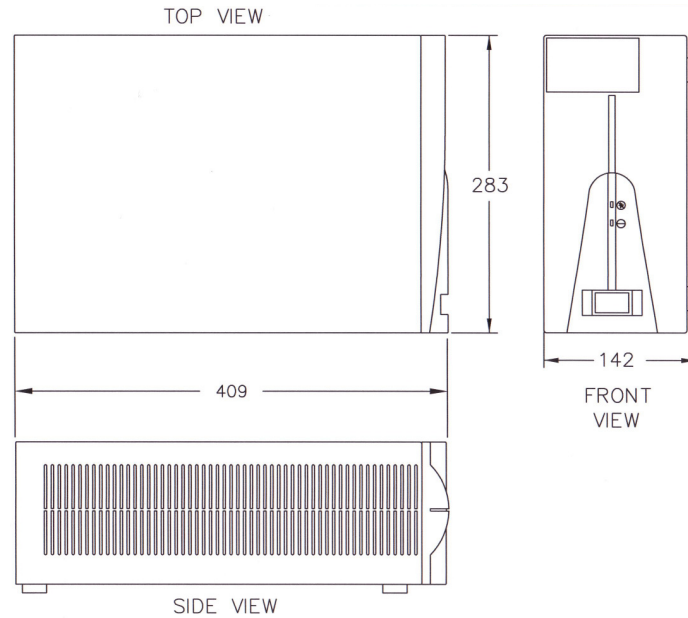

	ABC1000-22INT Part # 62042-XXR	ABC1250-22INT Part # 62052-XXR	ABC1500-22INT Part # 62063-XXR	ABC2000-22INT Part # 62083-XXR	ABC2500-22INT Part # 62104-XXR
VA Rating	1000	1200	1500	2000	2500
Frequency	50/60 Hz.	50/60 Hz.	50/60 Hz.	50/60 Hz.	50/60 Hz.
BTU/Hr. Output	136	171	205	273	341
T.H.D. % Added	<1%	<1%	<1%	<1%	<1%
Load Surge Current @					
1/2 cycle	162 amps	195 amps	225 amps	285 amps	330 amps
1 second	78 amps	92 amps	108 amps	125 amps	160 amps
10 seconds	23 amps	27 amps	32 amps	41 amps	55 amps
Input Voltage	200-264	200-264	200-264	200-264	200-264
Output Voltage	200-264	200-264	200-264	200-264	200-264
Output Current	4.16 amps	5.12 amps	6.25 amps	8.33 amps	10.42 amps
Efficiency	96%	96%	96%	96%	96%
Voltage Drop No Load to Full Load	5.2%	4.8%	4.4%	4%	4%
Earth Leakage Current	< 300 μamps	< 300 μamps	< 300 μamps	< 300 μamps	< 300 μamps
Wall mountable*	Yes	Yes	Yes	Yes	Yes
Compliance	UL, cUL, D-Mark CE, RoHS	UL, cUL, D-Mark CE, RoHS	UL, cUL, D-Mark CE, RoHS	UL, cUL, D-Mark CE, RoHS	UL, cUL, D-Mark CE, RoHS
Shipping Weight	17	18	20	23	28

*Add "W" to model number for wallmount

International Standard Conditioners - "D" Case Enclosure

POWERVER Part #

ABC1000-22 -62042-XXR**


ABC1250-22 -62052-XXR**

ABC1500-22 - 62063-XXR**

ABC2000-22 - 62083-XXR**

ABC2500-22 - 62104-XXR**

When ordering, add two digit number from below in place of **XX to specify receptacle option desired.





Option 1

-02 - IEC320 inlet module, three IEC320 receptacle strips with two output cords

-12 - IEC320 inlet module, three IEC320 receptacle with Shuko plug

Option 2

-06 - Shuko plug with three Shuko receptacles




Option 3

-08 - Shuko plug with one Shuko receptacle and two IEC320 receptacle strip

Option 4

-09 - Shuko plug with two Shuko receptacles and one IEC320 strip



NOISE REJECTION-ISOLATION: With unit under power and an ANSI/IEEE C62.41 Cat. A pulse applied either normal or common mode at the input, the noise output voltage will be less than 10V normal mode and less than 0.5V common mode in all four quadrants (CM-NM, NM-NM, CM-CM, NM-CM).

SURGE VOLTAGE WITHSTAND CAPABILITY: Tested under power to ANSI/IEEE C62.41 Cat. A & B (formerly IEEE587-1980). Cat. A - 6000V @ 200 amps, 0.5 usec risetime, 100 kHz decay, Cat. B - 6000V @ 500 amps, 0.5 usec risetime, 100 kHz decay.

Warranty/Support: POWERVER warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any POWERVER product, please contact POWERVER Technical Support at (800) 369-7179 (in Illinois call (847-596-7000)). For service and support in EMEA, contact POWERVER, Ltd. in the United Kingdom at +44 (0) 1793 553980. Or visit the POWERVER website at www.powervar.com.