


North American Single Phase Conditioner ABC2030-2S - Part # 95083-01R

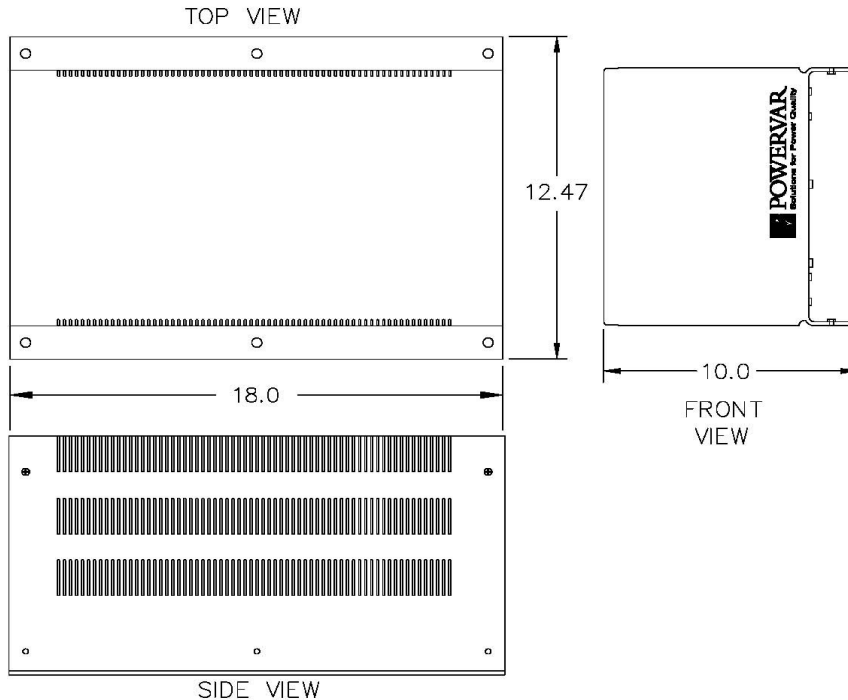


ABC2030-2S Part # 95083-01R	
VA Rating	2.0 kVA
Frequency	60 Hz.
BTU/Hr. Output	171
T.H.D. Max. %	<1%
Load Surge Current @	
1/2 cycle	200 amps
1 second	40 amps
10 seconds	21amps
Input Voltage	208 or 240
Output Voltage	120/240
Input Current 208/240	9.8 amps/8.5 amps
Output Current	8.33 amps per leg
Efficiency	97.5%
Voltage Drop No Load to Full Load	2.5%
Wall mountable*	Yes
Compliance	UL and cUL, RoHS
Shipping Weight (lbs.)	71

NOISE REJECTION-ISOLATION: With unit under power and an ANSI/IEEE C62.41Cat. A pulse applied either normal or common mode at the input, the noise output voltage will be less than 10V normal mode and less than 0.5V common mode in all four quadrants (CM-NM, NM-NM, CM-CM, NM-CM).

SURGE VOLTAGE WITHSTAND CAPABILITY: Tested under power to ANSI/IEEE C62.41 Cat. A & B (formerly IEEE587-1980). Cat. A - 6000V @ 200 amps, 0.5 usec risetime, 100 kHz decay, Cat. B - 6000V @ 500 amps, 0.5 usec risetime, 100 kHz decay.

North American Single Phase Conditioner ABC2030-2S - Part # 95083-01R

Hardwired connection only

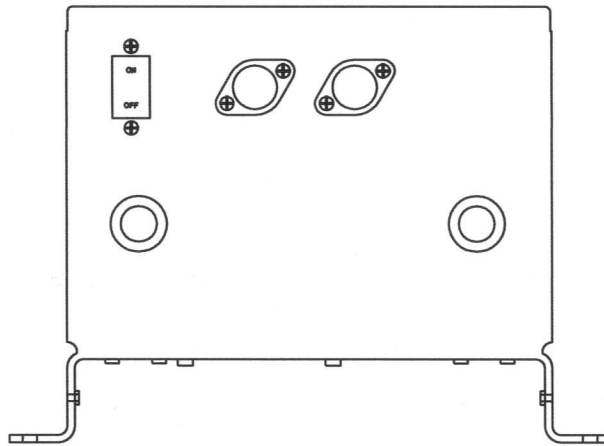

Warranty/Support: POWERVER warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any POWERVER product, please contact POWERVER Technical Support at (800) 369-7179 (in Illinois call (847-596-7000)). For service and support in EMEA, contact POWERVER, Ltd. in the United Kingdom at +44 (0) 1793 553980. Or visit the POWERVER website at www.powervar.com.

POWERVER, Inc. - 1450 Lakeside Drive, Waukegan, IL 60085
POWERVER, Ltd. - Unit 5 Birch, Kembrey Park, Swindon, Wiltshire, UK SN2 8UU