


Security II RACKMOUNT UPM PDU Specifications
North American Models PDU2008-11 and PDU2008-11MED

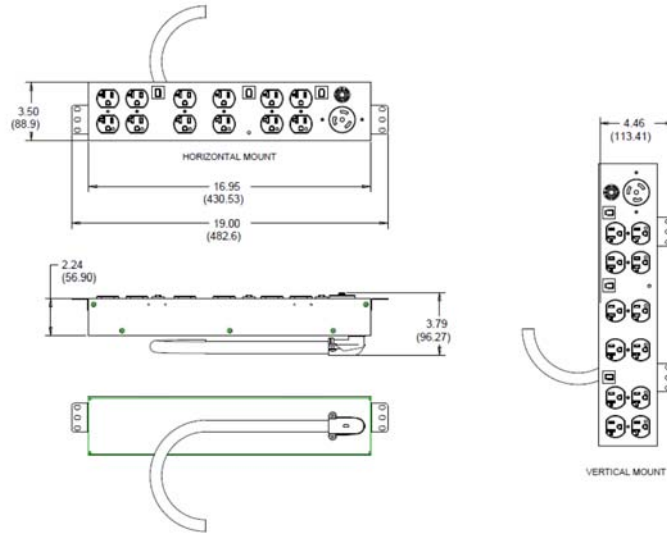

	PDU2008-11 53208-01R	PDU2008-11MED 53208-21R
Type	Standard PDU	Medical Grade PDU
Frequency	50 / 60 Hz.	50 / 60 Hz.
Input Voltage	120	120
Input Current	24 Amps	24 Amps
Output Voltage	120	120
Output Current	24 Amps	24 Amps
Shipping Weight (Lbs.)	13	13
Rear Panel Information and Controls <ul style="list-style-type: none"> • 6 Foot Power Cord with L5-30 Plug • Twelve (12) 5-20 and (1) L5-30 Receptacles • (4) Circuit Breaker Environmental <ul style="list-style-type: none"> • Temperature: 0 - +40° C (32 to 104°F) Operating -20 to 60° C (-40 to 140° F) Shipment/Storage • Humidity: 5 to 90% Non-Condensing (Operating, Shipment/Storage) • Altitude: 3,000m (10,000 ft) max. Operating; 12,000m (40,000 ft) max. Shipment/ 		Safety Agency and EMC Compliance: All Units are Listed by UL 60950-1, 2nd Edition, 2014-10-4 Marked with the UL/cUL Marking. *RoHS Compliance: All Products (Standard and Medical) are RoHS Compliant

Warranty/Support: For service or support on any POWERVAR product, please contact POWERVAR Technical Support at (800) 369-7179 or visit the POWERVAR website at www.powervar.com.