
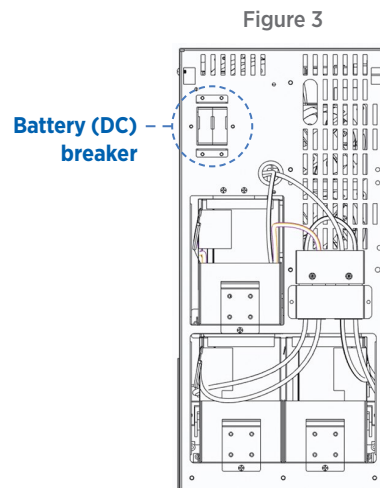
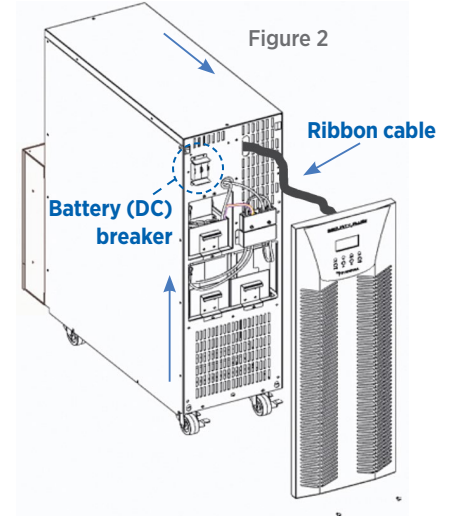



POWERVER SECURITY PLUS II

Quick Start Guide


1. Connect to (AC) source (via line cord or hard wired options)
2. Make all load connections to the rear of unit
3. Using a #2 Phillips screwdriver, remove two screws at the bottom of the front panel (Fig. 1)
4. Lift panel upward and pull forward, taking care to ease out ribbon cable. Place panel off to side (Fig. 2)
5. Turn on battery (DC) breaker (Fig. 3)
6. Replace front panel (Fig. 3)
7. Turn on AC (mains) input breaker located on the rear panel of unit (Fig. 4)
8. Energize applied loads
9. Press and hold "ON button, alarm will beep once. (fig. 5)

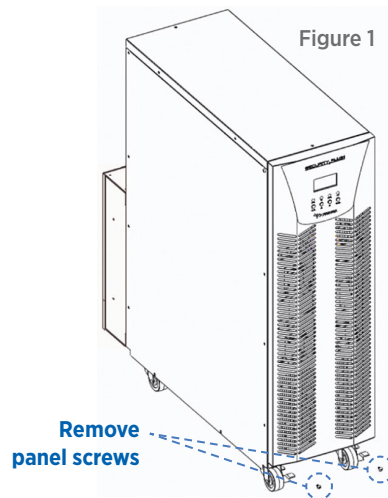

Close up: Front of UPS with panel removed

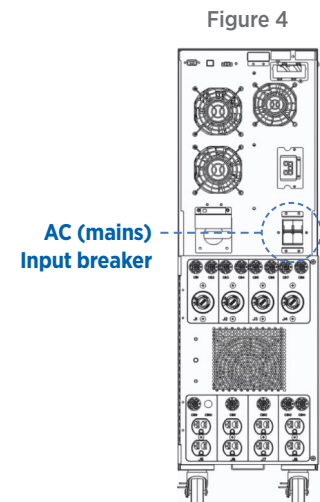

Rear of UPS

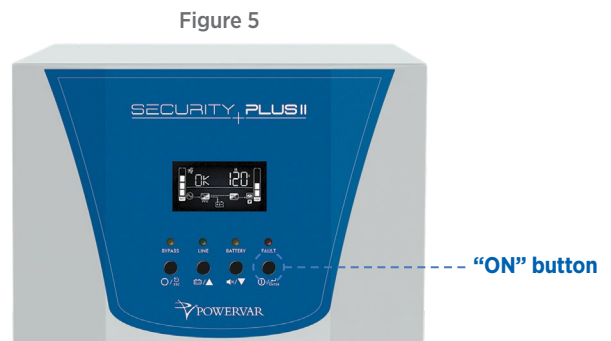

Touch screen on front of UPS



User's Manual can be found at:
www.powervar.com



Technical support is available 24/7 at **800-369-7179**.