




ZONE 4 MOUNT BRACKETS  
FRONT VIEW

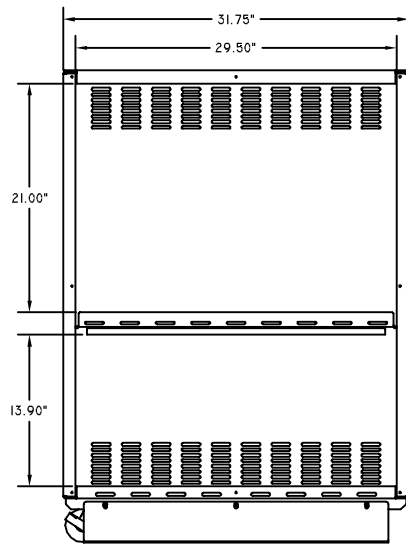


RIGHT SIDE VIEW-SINGLE SHELF (COVER REMOVED)

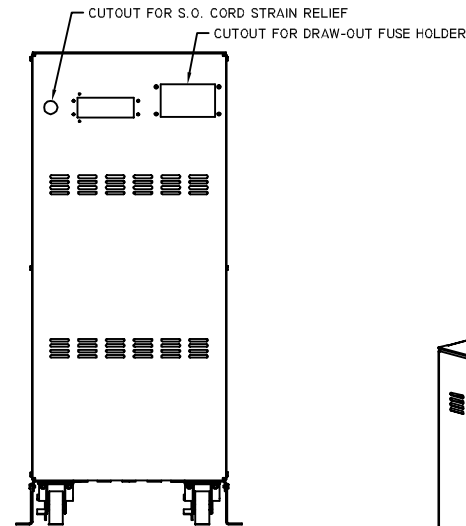


REAR VIEW

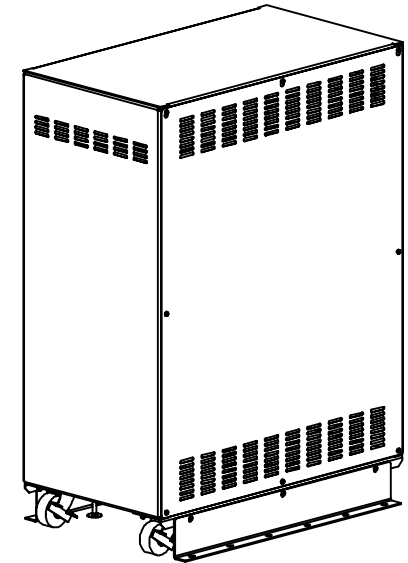

ISOMETRIC VIEW

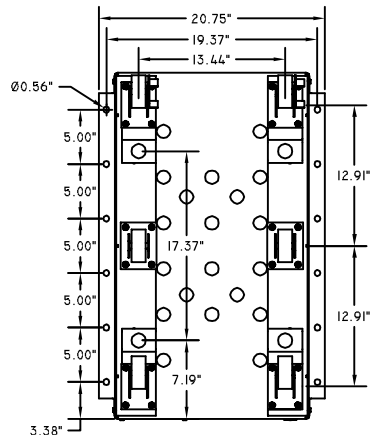


BOTTOM VIEW

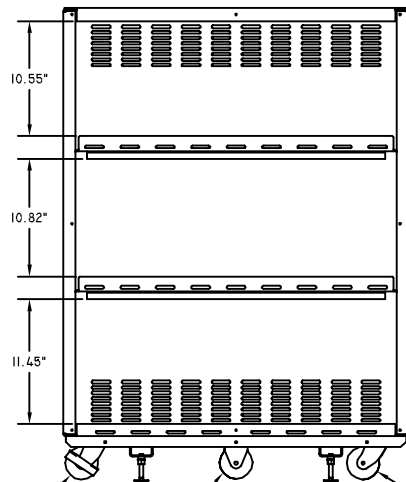

LOCKABLE SWIVEL CASTERS RIGID CASTERS SWIVEL CASTERS ADJUSTABLE LEVELING FEET

RIGHT SIDE VIEW-DUAL SHELF (COVER REMOVED)  
ZONE 4 MOUNT BRACKETS REMOVED

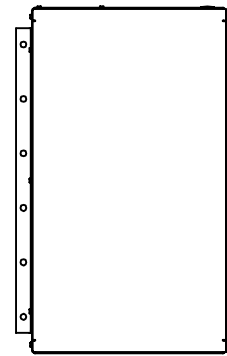


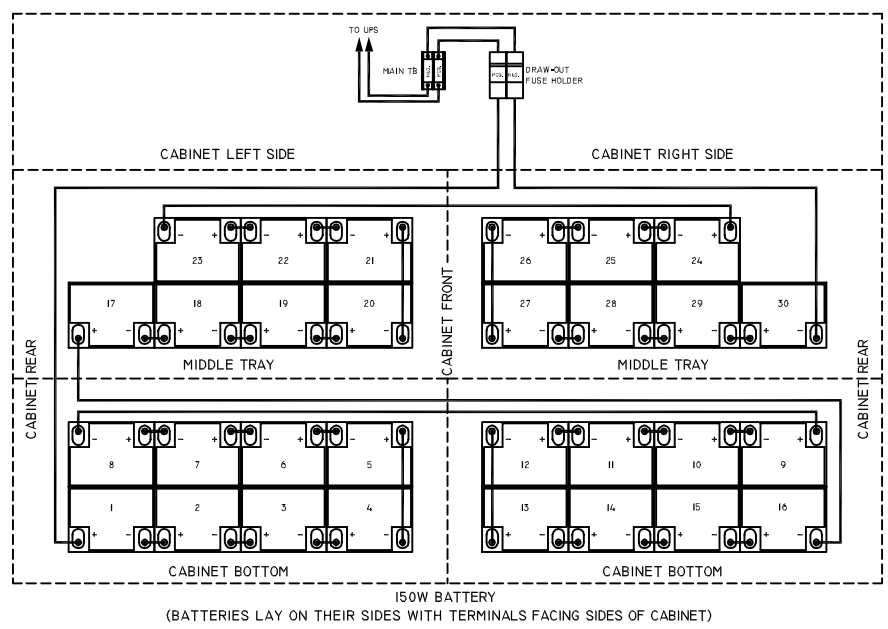
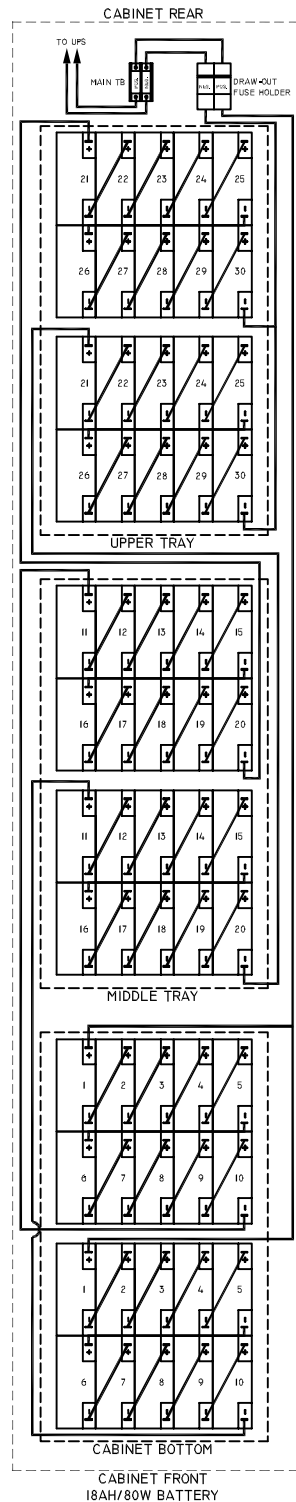
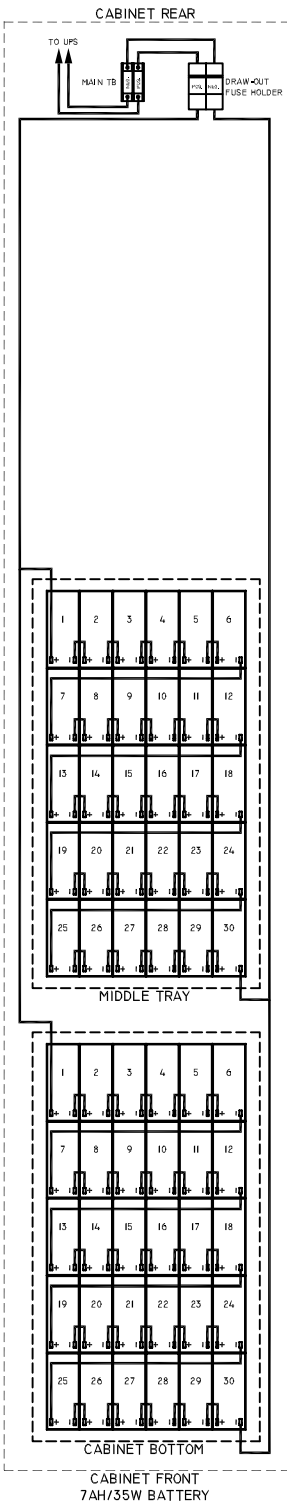
TOP VIEW

**CABINET NOTES:**

EMPTY CABINET WEIGHT: 165 Lbs.

1. NEMA 1 ENCLOSED BATTERY CABINET.
2. FACTORY ASSEMBLED CABINETS ARE UL LISTED I778 & CSA LISTED 22.2 NO. 107.1-M95.
3. CABINET IS ZONE 4 RATED AND CERTIFIED (SEE ZONE 4 ANCHORAGE DRAWING FOR DETAILS)
4. CABINET BODY IS 12 GA. COLD ROLLED STEEL.
5. SIDE COVER PANELS ARE 16 GA. COLD ROLLED STEEL.
6. BATTERY TRAY IS 12 GA. COLD ROLLED STEEL.
7. PAINT IS CY GRAY POWDER COAT, OVEN BAKED FOR CHIP AND CORROSION RESISTANT FINISH.
8. BATTERIES CAN BE ACCESSED FROM THE SIDES BY REMOVING COVERS.
9. CABINET IS SUPPLIED ON SKID WITH HEAVY DUTY RAMP FOR EASY UNLOADING. CABINET IS TO BE MOVED USING CABINET CASTERS.

91410		BCI4 BATTERY CABINET	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE!	
DECIMALS: .XX ±.01 .XXX ±.005	ANGLES: XXX ±1°	APPROVALS	DATE
		DRAWN CH	04/13/05
		CHECKED ---	--/--/--
		RESP ENG ---	--/--/--
		MFG ENG ---	--/--/--
		DUAL ENG ---	--/--/--
DO NOT SCALE DRAWING		SCALE: N.T.S.	CAD FILE: ---
		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF C&C POWER, INC. ANY REPRODUCTION WITHOUT THE WRITTEN CONSENT OF C&C POWER, INC IS PROHIBITED.	
		 <b>C&amp;C POWER, INC.</b> 949 N. LARCH AVE. ELMHURST, IL 60126	
		SIZE/DWG. NO. A 91410-SDC01-I REVI	REV. 1
		SHEET 1 OF 2	



BATTERY TERMINALS & TORQUE SPECS		
BATTERY MODEL	TERMINAL TYPE	TORQUE
SR12-7.5AF, SR12-35F	.187" TAB	N/A
SR12-80F, SR12-95F, SR12-111F	M5 THREADED INSERT	21 IN. LBS.
SR12-175F	M6 THREADED INSERT	40 IN. LBS.
NP7-12FR	.187" TAB	N/A
NP18-12BFR, NPX80	M5 FLAG	22 IN. LBS.
NPX-100, NPX-150	M5 THREADED INSERT	26 IN. LBS.
U1HR1500	1/4" FLAG	60 IN. LBS.
UPS12-100FR	3/16" FLAG	40 IN. LBS.
UPS12-140FR	1/4" FLAG	40 IN. LBS.

**ELECTRICAL NOTES:**

1. ALL INTERNAL WIRING IS UL LISTED, MTW, STYLE, I05C, EXTRA FLEXIBLE CABLE.
2. FUSES ARE UL LISTED, TYPE A4J OR JLS
- \*CABINET IS SHIPPED WITH FUSES REMOVED!!
3. TERMINAL BLOCK IS UL RECOGNIZED, 600V RATED.
4. GROUND CONNECTION IS 1/4-20 STUD.

**BCI4 TYPICAL WIRING**  
(PLEASE CONSULT FACTORY FOR ADDITIONAL CONFIGURATIONS)

91410		BCI4 BATTERY CABINET	
--		--	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE!	
DECIMALS: .XX ±.01 .XXX ±.005		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF C&C POWER, INC. ANY REPRODUCTION WITHOUT THE WRITTEN CONSENT OF C&C POWER, INC IS PROHIBITED.	
ANGLES: XXX ±1°		APPROVALS	
MATERIAL		DATE	
FINISH		DRAWN CH 04/13/05	
DO NOT SCALE DRAWING		CHECKED -- --/--/--	
		RESP ENG -- --/--/--	
		MFG ENG -- --/--/--	
		QUAL ENG -- --/--/--	
		SIZE DWG. NO. A 91410-SDC01-2 REVI 1	
		SCALE: N.T.S. CAD FILE: -- SHEET: 2 OF 2	

