


North American Single Phase Conditioner ABC3000-11 - Part # 95241-XX*R

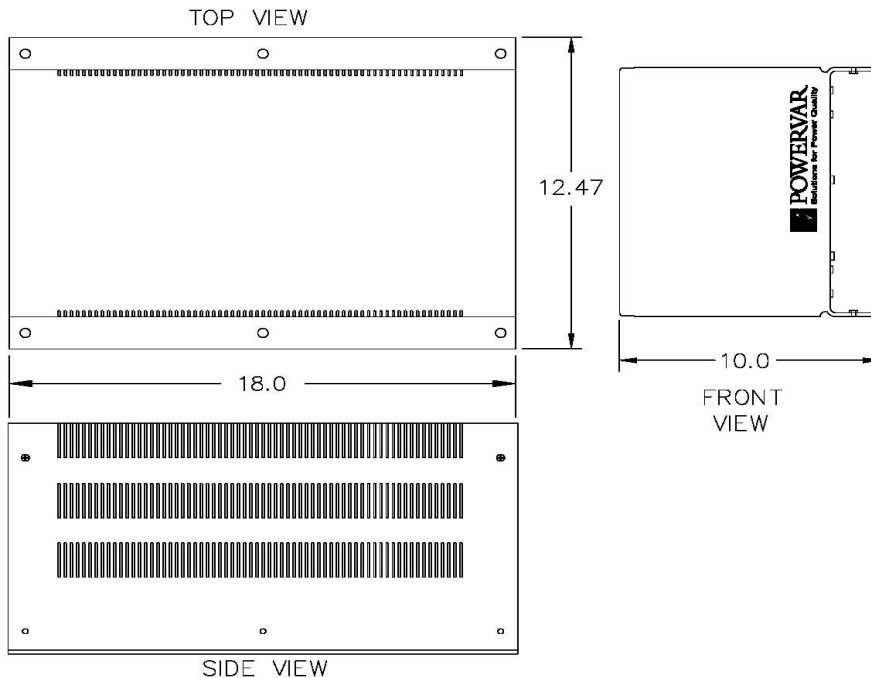

ABC3000-11 Part # 95241-XX*R	
VA Rating	2.8 kVA
Frequency	60 Hz.
BTU/Hr. Output	287
T.H.D. Max. %	<1%
Load Surge Current @	
1/2 cycle	550 amps
1 second	110 amps
10 seconds	50 amps
Input Voltage	120
Output Voltage	120
Input Current	25.75 amps
Output Current	24 amps
Efficiency	97%
Voltage Drop No Load to Full Load	3%
Wall mountable*	Yes
Compliance	UL and cUL, RoHS
Shipping Weight (lbs.)	85

NOISE REJECTION-ISOLATION: With unit under power and an ANSI/IEEE C62.41Cat. A pulse applied either normal or common mode at the input, the noise output voltage will be less than 10V normal mode and less than 0.5V common mode in all four quadrants (CM-NM, NM-NM, CM-CM, NM-CM).

SURGE VOLTAGE WITHSTAND CAPABILITY: Tested under power to ANSI/IEEE C62.41 Cat. A & B (formerly IEEE587-1980). Cat. A - 6000V @ 200 amps, 0.5 usec risetime, 100 kHz decay, Cat. B - 6000V @ 500 amps, 0.5 usec risetime, 100 kHz decay.


North American Single Phase Conditioner ABC3000-11 - Part # 95241-XX*R

Available Plug/Receptacle Options

*When ordering, add two digit number from below in place of **XX** to specify receptacle option desired.

-18 - 5-30P plug, L5-30R receptacle and
two 5-20R duplex receptacles

-19 - L5-30P plug, L5-30R receptacle and
two 5-20R duplex receptacles

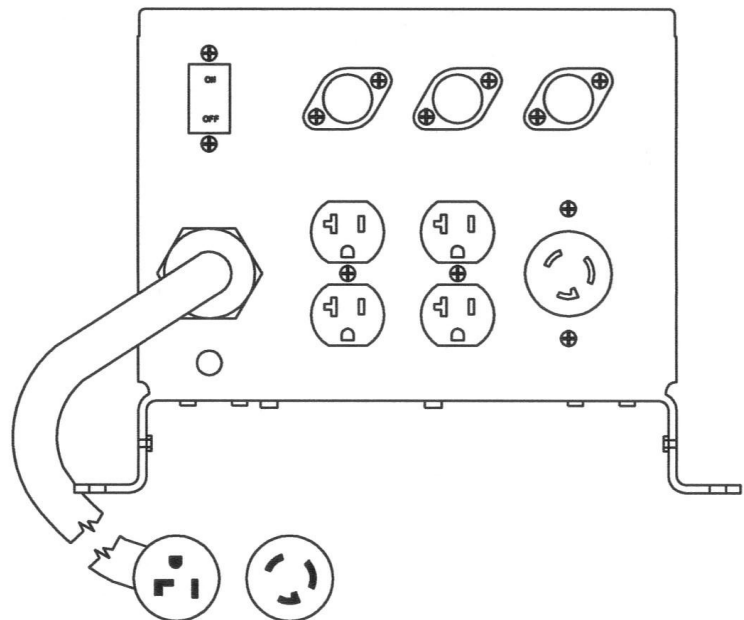

Warranty/Support: POWERVER warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any POWERVER product, please contact POWERVER Technical Support at (800) 369-7179 (in Illinois call (847-596-7000)). For service and support in EMEA, contact POWERVER, Ltd. in the United Kingdom at +44 (0) 1793 553980. Or visit the POWERVER website at www.powervar.com.

POWERVER, Inc. - 1450 Lakeside Drive, Waukegan, IL 60085
POWERVER, Ltd. - Unit 5 Birch, Kembrey Park, Swindon, Wiltshire, UK SN2 8UU